



### Features

- Suitable for RoHS reflow
- Available for tight stability & extended temperature range

### Applications

- Computers, Modems, Microprocessors
- Wireless Applications


General Specifications	
Frequency Range	3.200 to 70.000MHz
Mode of Oscillation	Fundamental 3.200 to 32.768MHz
	Third Overtone 24.576 to 70.000MHz
Frequency Tolerance at 25°C	±10 to ±30ppm (±30ppm standard)
Frequency Stability over Temperature Range	See Stability vs. Temperature Table
Storage Temperature	-55 to +125°C
Aging per Year	±3ppm max.
Load Capacitance $C_L$	10 to 32pF and Series Resonance
Shunt Capacitance $C_0$	7.0pF
Equivalent Series Resistance (ESR)	See ESR Table
Drive Level	1.0mW max.
Insulation Resistance (MΩ)	500 at 100Vdc ±15Vdc

Equivalent Series Resistance (ESR)		
Frequency Range - MHz	Ω max.	Mode of Operation
3.200 to 3.499	150	Fundamental / AT
3.500 to 3.999	120	
4.000 to 5.999	100	
6.000 to 6.999	70	
7.000 to 8.999	60	
9.000 to 9.999	50	
10.000 to 12.999	40	
13.000 to 19.999	30	
20.000 to 30.999	20	Third Overtone
30.000 to 66.999	80	

Frequency Stability vs. Temperature					
Operating Temperature	±10ppm	±20ppm	±30ppm	±50ppm	±100ppm
-20 to +70°C	○	○	○	○	○
-40 to +85°C	○*	○	○	●	○

\*Operating Temperature -30 to +85°C

● standard ○ available

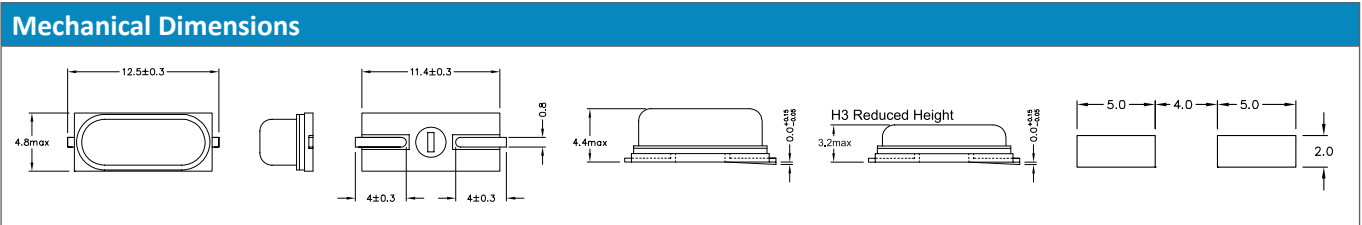

### Part Numbering Guide

Quarz-technik Code	Package	Nominal Frequency (in MHz)	Vibration Mode	Load Capacitance	Frequency Tolerance	Operating Temperature Range	Frequency Stability	Package Option	Packaging
QT = Quarz-technik	CS = HC-49/U-S SMD 2-Pad	7 digits including the decimal point (f.i.e. 12.0000)	F = AT-Fund	S = Series A = 8pF <b>B = 12pF</b> C = 16pF D = 18pF E = 20pF	T1 = ±10ppm T2 = ±20ppm <b>T3 = ±30ppm</b> T5 = ±50ppm T0 = ±100ppm	C = -20 - +70°C <b>I = -40 - +85°C</b>	10 = ±10ppm 15 = ±15ppm 20 = ±20ppm <b>30 = ±30ppm</b> 50 = ±50ppm 00 = ±100ppm	H3 = 3.2mm	M = 250pcs Tape&Reel R = 1000pcs Tape&Reel B = Bulk

Example: QTCS12.0000FBT3I30R

bold letters = recommended standard specification



Quarztechnik Daun GmbH

Quartz Crystals • Oscillators • Sensor Technology



Alte Darscheider Strasse 15  
54550 Daun • Germany

Phone: +49 0 6592-92070  
Fax: +49 0 6592-7670

info@quarztechnik.com  
www.quarztechnik.com



Tape and Reel Dimensions

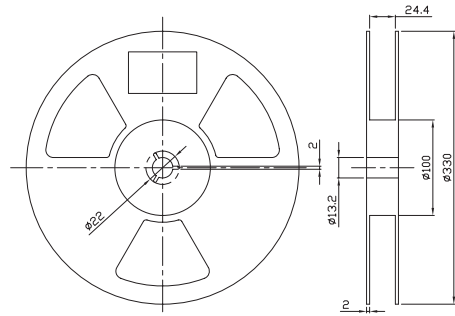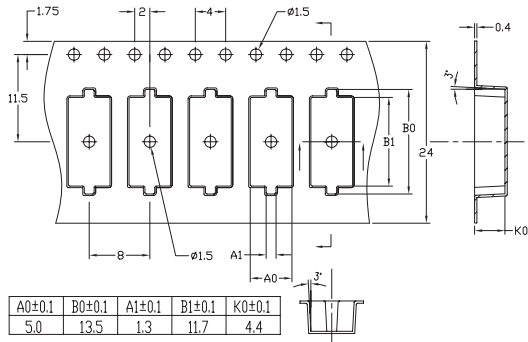


Marking Code Guide

Contains frequency, Quarztechnik manufacturing code, production code (month and year) and load capacitance.

Month Codes				Year Codes						Load Capacitance Code in pF			
January	A	July	G	2020	0	2021	1	2022	2	pF	PN Code	pF	PN Code
February	B	August	H	2023	3	2024	4	2025	5	12	A	20	F
March	C	September	I	2026	6	2027	7	2028	8	18	B	22	G
April	D	October	J	2029	9	2030	0	2031	1	8	C	30	H
May	E	November	K							10	D	32	I
June	F	December	L							16	E	S	S

Example: First Line: 12.000 (Frequency) Second Line: QA0A (Quarztechnik - January - 2020 - 12 pF)

Solder Reflow Profile

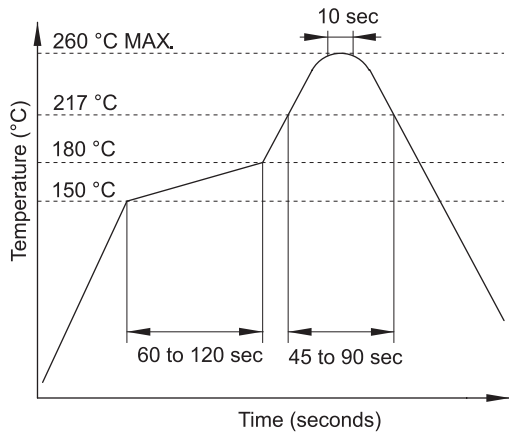

Environmental Specifications

Mechanical Shock	MIL-STD-202, Method 213, C
Vibration	MIL-STD-202, Method 201 & 204
Thermal Cycle	MIL-STD, Method 1010, B
Gross Leak	MIL-STD-202, Method 112
Fine Leak	MIL-STD-202, Method 112



Quarztechnik Daun GmbH

Quartz Crystals • Oscillators • Sensor Technology

Alte Darscheider Strasse 15  
54550 Daun • Germany

Phone: +49 0 6592-92070  
Fax: +49 0 6592-7670

info@quarztechnik.com  
www.quarztechnik.com

